
 This luminaire is compatible with bulbs of the energy classes:



This luminaire is sold with a bulb of the energy class: **A**

874/2012 

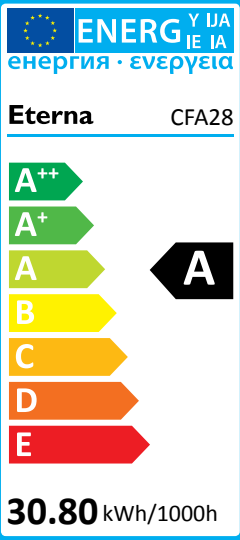

  
Replacement lamp available for 2D version

AUREOLA GLASS WALL/CEILING FITTINGS

- Pressed steel base • Glass diffuser
  - Highly polished chrome effect trim
  - Primarily designed for bathrooms
- CFA28 (2D)**
- Requires 1 x 28W GR10q 4 pin DD CFL (included). Fitting is rated at 28W max
  - This luminaire is compatible with bulbs of the energy classes: A to E and is sold with a bulb of the energy class: A
  - High frequency electronic ballast: instant start, flicker free operation, and prolonged lamp life


- CFA100 (ES)**
- Requires 1 x suitable ES energy saving lamp (not included). Fitting is rated at 100W max
  - This luminaire is compatible with bulbs of the energy classes: A++ to E


- **Fitting** = M.O.M: 1 / O.P.Q: 5
- **Lamp** = M.O.M: 10 / O.P.Q: 10

Code	Version	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	Energy Rating
CFA100	ES (E27)	Chrome	100W Max	-	-	-	IP44	-
CFA28	2D		28W	3500K	2050 lm	8,000 hrs		A
DD28435	Lamp	White				10,000 hrs	-	



Eterna CFA100

 This luminaire is compatible with bulbs of the energy classes:



874/2012 

CFA28 LAMP SPECIFICATIONS:

Nominal Wattage	28W
Rated Wattage	28W
Average lifetime hours	8,000 hrs
Nominal useful luminous flux	<b>2050 lm</b>
Rated luminous flux	2050 lm
Luminous efficacy (Lm/W) in 50Hz operation	73
Rated lamp Lumen maintenance	2000hrs: ≥85% 4000 hrs: ≥78% 6000 hrs: ≥76% 8000 hrs: ≥75%
Rated survival factors	2000hrs: ≥98% 4000 hrs: ≥90% 6000 hrs: ≥88% 8000 hrs: ≥50%
Lamp dimensions (mm)	205 x 208mm
Cap type	GR10q
Lamp Mercury content to an accuracy of 0.1mg	<2.5mg
Colour rendering index Ra	≥80
Colour temperature	3500K
Ambient temperature required to achieve maximum luminous flux	25°C
Dimmable	No
Ballast EEL	A2