## CATALOGUE RANGE: Bathroom Lighting

## Lighting design service available

SHAVER

[5 110V


5

Year Warranty

IP44

Bathroom Zone 3

Earthed



LED array

SHAVERS ONLY

5 110V

LED LAMP SPECIFICATIONS:						
Luminaire lumens (with diffuser)	<b>410 lm</b>					
Lumens from chip (no diffuser)	590 lm					
Useful lumens	380 lm					
Rated Wattage	5.5W					
Rated luminous flux	380 lm					
Nominal life time of the lamp	al life time of the lamp 25,000 hrs					
Colour temperature	3000K					
Number of switching cycles before premature lamp failure	12500					
Warm-up time up to 60% of the full light output	Instant full light					
Dimmable	No					
Nominal beam angle	l beam angle 120°					
Rated power	5.5W					
Rated lamp lifetime	25,000 hrs					
Displacement factor	≥0.9					
Lumen maintenance factor at end of nominal life	≥0.8					
Starting time	Instant full light					
Colour rendering	≥80					
Colour consistency	Within a six step Macadam ellipse					
Rated peak intensity	171.88cd					
Rated beam angle	120°					
Voltage / Frequency	240V~50Hz					
Lumen efficacy: 17	4 lm / W					
This product contains a Light Efficiency Clas						
Earthed						
Not suitable for accer	it lighting					




## LED DUAL VOLTAGE SHAVER LIGHT

Ever popular fittings offering functionality and long term performance for domestic and commercial bathrooms

- Polycarbonate construction
- Optional fit chrome effect trims included
- Dual voltage shaver socket and safety isolating transformer: for bathroom use
- Permanent power to shaver socket: with a pull cord switch for isolated illumination
- Access cover to connection block: easy wiring from the front of the fitting
- Please note: bathroom shaver lights are not suitable for toothbrush chargers

Code	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	Fitting IP Rating	Socket IP Rating	MOM / OPQ
LEDSH44	5.5W	3000K	410 lm	25,000 hrs	IP44	IP21	1/10

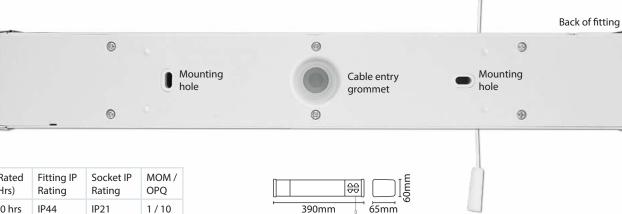

SHAVERS ONLY

110V 240V