


High performance perimeter wall light, which is perfect for wall mounting, lighting walkways and car park areas.



8.5m spacing at 3m mounting height to achieve 10 lux average along 5m perimeter



PERFECT FOR WALL MOUNTING, LIGHTING WALKWAYS & CAR PARK AREAS

2 part, easy fixing wall mounting bracket



Eterna
Everyday Lighting For Professionals


20W LED PERIMETER LIGHT

High output, low power, corrosion resistant wall mounted LED area lighting fixture which is ideal for lighting building perimeters. When mounted at 3 metre high each fixture can illuminate an area of 8.5 metre (W) 5 metre (D).

- Polycarbonate housing and diffuser
- Pre-wired with 1 metre cable & connection box
- Integral photocell which can be bypassed on installation to allow normal on/off switching
- 2 part, easy fixing wall mounting bracket
- Optically optimised diffuser
- High 90 lm / Watt output
- IES file available • CRI >80

• M.O.M: 1 / O.P.Q: 12



EternaPro
LED
5 YEAR
Warranty*



PERLED20 Illuminance Area

EXAMPLE FOR MEDIUM TRAFFIC PARKING AREAS
≥10 LUX AVERAGE

Office buildings • Plants • Sports & Multipurpose Building Complexes

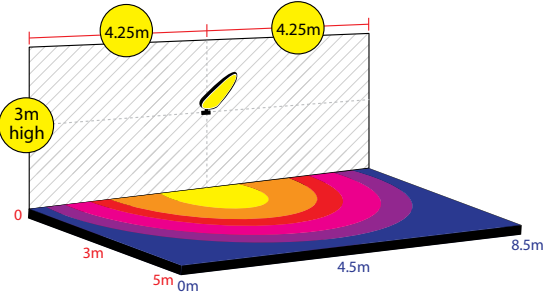

Based On Maintenance Factor 0.8

LED LAMP SPECIFICATIONS:	
Lumens total flux	1800 lm
Rated Wattage	20W
Rated luminous flux	1800 lm
Nominal life time of the lamp	25,000 hrs
Colour temperature	3000K
Number of switching cycles before premature lamp failure	20,000
Warm-up time up to 60 % of the full light output	Instant full light
Dimmable	No
LED strip dimensions (L/W)	270 x 60mm
Nominal beam angle	160°
Rated power	20W
Rated lamp lifetime	25,000 hrs
Lamp power factor	0.85
Lumen maintenance factor at end of nominal life	70%
Starting time	<0.5s
Colour rendering	>80
Colour consistency	Within 6 step Macadam ellipse
Rated peak intensity	540cd
Rated beam angle	160°
Voltage	240V