


1

Year Warranty



Double Insulated

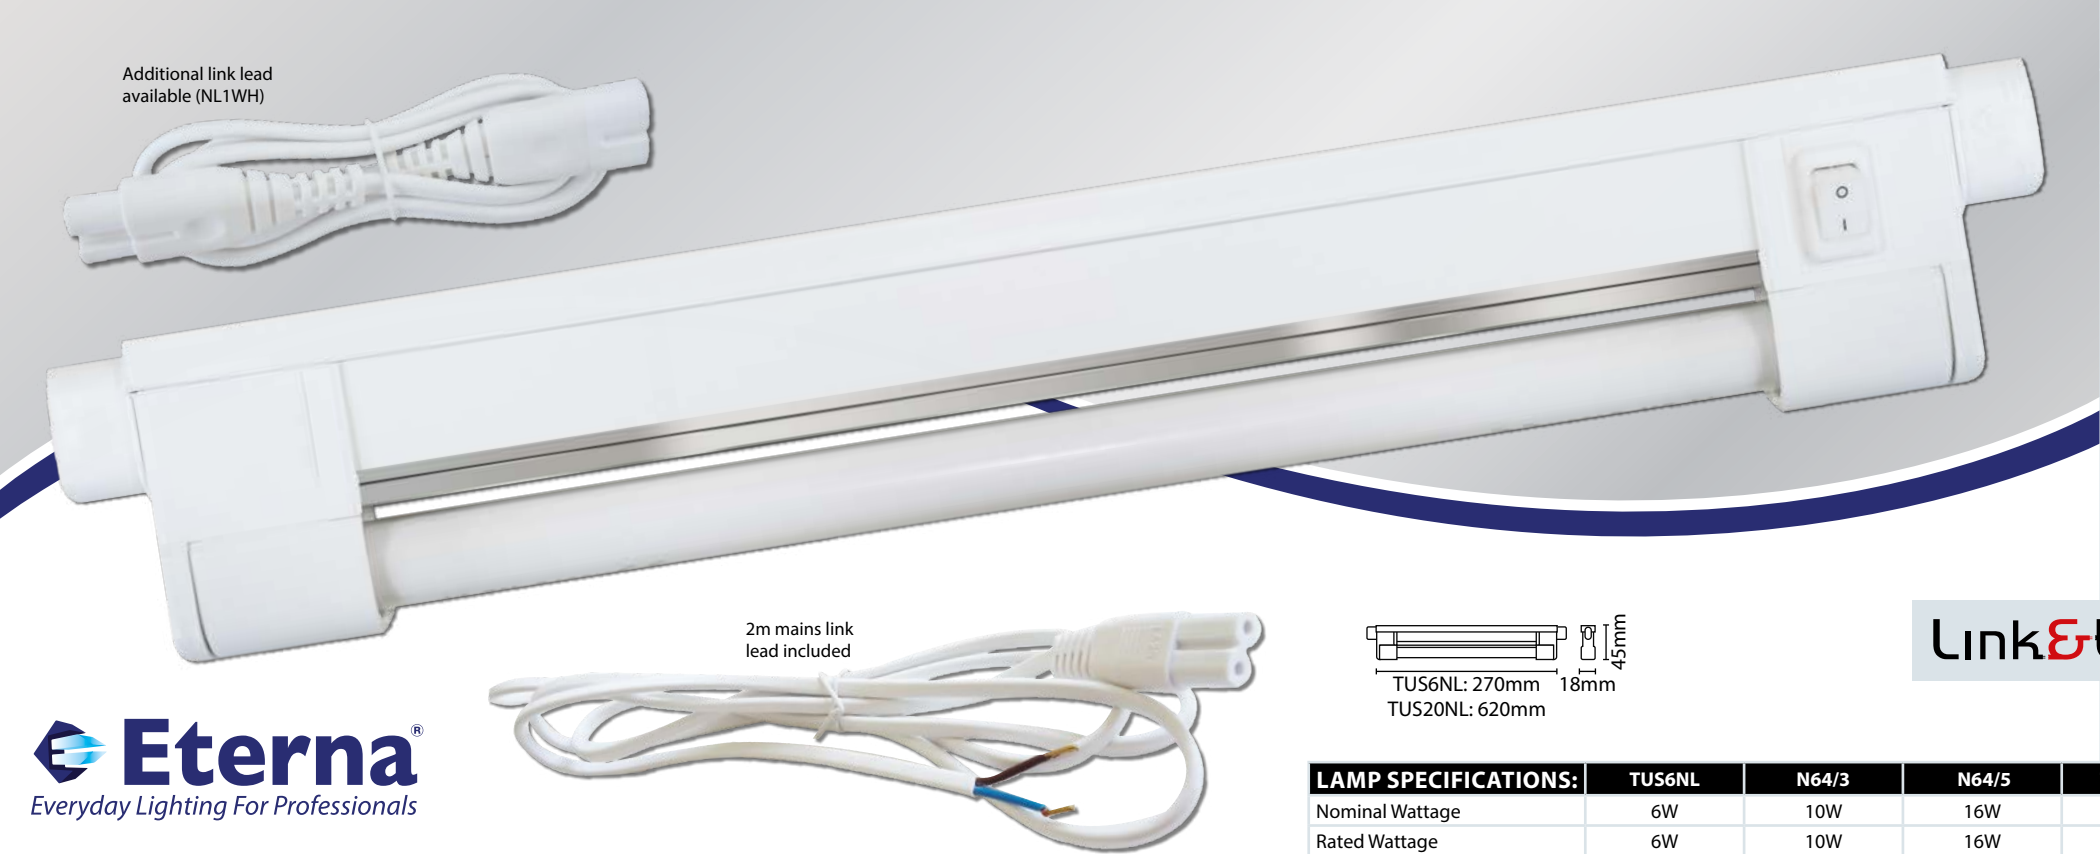

**Eterna**  
Everyday Lighting For Professionals




LINEAR T4 LINKABLE TRIPHOSPHOR UNDER CABINET FITTINGS

- **TUS6NL** requires 1 x 6W G5 T4 220mm fluorescent tube (included). Fitting is rated at 6W max
- **TUS20NL** requires 1 x 20W G5 T4 567mm fluorescent tube (included). Fitting is rated at 20W max
- Polycarbonate construction • Individual rocker switch • Link & light system compatible
- Incorporates plug and socket with through wiring: can be linked with up to 5 other fittings
- 2 metres link mains lead included

LAMPS (N64 RANGE):

- Glass construction • Not dimmable

Code	Length	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)	IP Rating	MOM / OPQ
TUS6NL	270mm	6W	3400K	378 lm	10,000 hrs	IP20	5 / 50
TUS20NL	620mm	20W		1500 lm			
Triphosphor Lamps							
N64/3	341mm	10W	3400K	630 lm	10,000 hrs	IP20	10 / 200
N64/5	468mm	16W	3400K	1090 lm	10,000 hrs	IP20	10 / 100
Accessories							
NL1WH	1m	White Link Lead				IP20	5 / 200

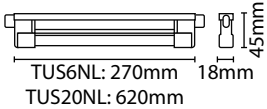

Link&Light

LAMP SPECIFICATIONS:	TUS6NL	N64/3	N64/5	TUS20NL
Nominal Wattage	6W	10W	16W	20W
Rated Wattage	6W	10W	16W	20W
Average lifetime hours	10,000 hrs	10,000 hrs	10,000 hrs	10,000 hrs
Nominal useful luminous flux	378 lm	630 lm	1090 lm	1500 lm
Rated luminous flux	378 lm	630 lm	1090 lm	1500 lm
Luminous efficacy (Lm/W) in 50Hz operation	63	63	67	75
Rated lamp Lumen maintenance	2000hrs: 95% 4000 hrs: 92% 8000 hrs: 90%	2000hrs: 95% 4000 hrs: 92% 8000 hrs: 90%	2000hrs: 95% 4000 hrs: 92% 8000 hrs: 90%	2000hrs: 95% 4000 hrs: 92% 8000 hrs: 90%
Rated survival factors	2000hrs: 99% 4000 hrs: 97% 8000 hrs: 90%	2000hrs: 99% 4000 hrs: 97% 8000 hrs: 90%	2000hrs: 99% 4000 hrs: 97% 8000 hrs: 90%	2000hrs: 99% 4000 hrs: 97% 8000 hrs: 90%
Lamp dimensions (mm)	220mm	341mm	468mm	567mm
Cap type	T4	T4	T4	T4
Lamp Mercury content to an accuracy of 0.1mg	<2mg	<2mg	<2.5mg	<2.5mg
Colour rendering index Ra	83.2	82.9	81.8	82.5
Colour temperature	3400K	3400K	3400K	3400K
Ambient temperature required to achieve maximum luminous flux	25°C	25°C	25°C	25°C
Dimmable	No	No	No	No
Ballast EEL	A2	A2	A2	A2
This product contains a Light Source of Energy Efficiency Class G				